



TSK, TSK-V, TSKM – check flap



TSK 200–560 (vertical and horizontal)
TSK-V 630–1250 (vertical only)

- for circular ducts
- for mounting on the fan discharge
- „butterfly“ design
- made of galvanized steel
- from size 630 inclusive, the TSK damper has counterweights on the blades and can only be mounted in horizontal ducts
- for vertical ducts from size 630 inclusive, the TSK-V damper is intended (the air flow direction is only possible upwards)
- dimensions correspond to the flanges of the TCB, TGT duct fans
- the TSKM damper is prepared for mounting an actuator, is only supplied up to size 630 (the damper must always be opened by the actuator before starting the fan and closed only after it is switched off)



Max. lever deflection

TSK 630–1250
(horizontal only)

Type	Type	Type	Ø D	E	F	Ø H	Ø J	L	M
TSK 200	–	TSKM 200	200	170	–	235	265	–	–
TSK 250	–	TSKM 250	250	170	–	292	327	–	–
TSK 315	–	TSKM 315	315	200	–	355	386	–	–
TSK 355	–	TSKM 355	355	230	–	395	426	–	–
TSK 400	–	TSKM 400	400	250	–	450	487	–	–
TSK 450	–	TSKM 450	450	280	–	500	537	–	–
TSK 500	–	TSKM 500	500	300	–	560	595	–	–
TSK 560	–	TSKM 560	560	360	–	620	655	–	–
TSK 630*	TSK-V 630**	TSKM 630	630	360	360	690	725	120	220
TSK 710*	TSK-V 710**	–	710	380	380	770	806	120	260
TSK 800*	TSK-V 800**	–	800	400	400	860	896	130	305
TSK 900*	TSK-V 900**	–	900	400	450	970	1020	170	355
TSK 1000*	TSK-V 1000**	–	1000	400	500	1070	1120	170	405
TSK 1250*	TSK-V 1250**	–	1250	400	625	1320	1370	180	530

* can only be mounted in a horizontal pipe


** can only be installed in a vertical pipe

TSK BR – check flap



EN 12101-3
approval

- non-return valve with resistance F400 (120)
- for installation on the fan discharge
- „butterfly“ design
- made of galvanized steel
- dimensions correspond to the flanges of THGT duct fans
- from size 630 inclusive can only be installed in horizontal pipes
- for vertical pipes from size 630 the TSK-V BR damper is intended (see chapter 1.7)

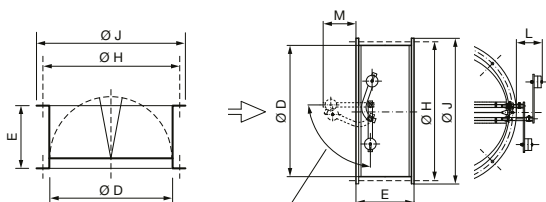

Max. lever deflection

TSK BR 400–560

TSK BR 630–1250

Type	Ø D	E	Ø H	Ø J	L	M
TSK 400	400	250	450	487	–	–
TSK 450	450	280	500	537	–	–
TSK 500	500	300	560	595	–	–
TSK 560	560	360	620	655	–	–
TSK 630*	630	360	690	725	120	220
TSK 710*	710	380	770	806	120	260
TSK 800*	800	400	860	896	130	305
TSK 900*	900	400	970	1020	170	355
TSK 1000*	1000	400	1070	1120	170	405
TSK 1250*	1250	400	1320	1370	180	530

* can only be mounted in a horizontal pipe