
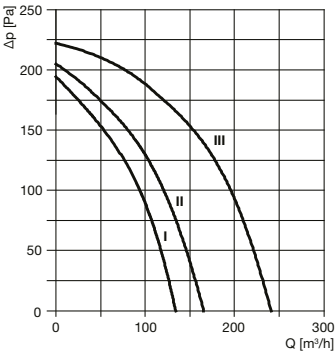


Built-in hoods

GE-60 E N METAL





- choice of three fan speeds
- lighting: LED 2× 3 W
- professional metal grease filter
- check valve on discharge
- upper outlet for connection
- air recirculation through carbon filters (accessories)
- design: gray
- available sizes (width in mm): 600
- I – low speed
- II – medium speed
- III – high speed

Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
GE-60 E N METAL	224	120	1	3	230	75	0.35	42

* sound pressure measured at a distance of 1.5 m in a free field

GL-60 E N PLUS METAL

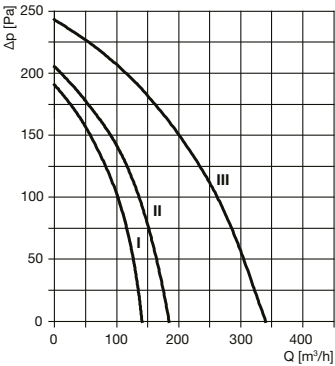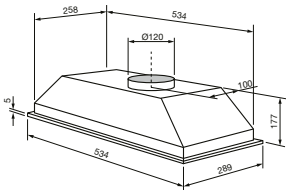


- choice of three fan speeds
- lighting: LED 2× 3 W
- professional metal grease filter
- check valve on discharge
- upper outlet for connection
- air recirculation through carbon filters (accessories)
- design: gray
- available sizes (width in mm): 600
- I – low speed
- II – medium speed
- III – high speed


Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
GL-60 E N PLUS METAL	302	120	1	3	230	115	0.53	50

* sound pressure measured at a distance of 1.5 m in a free field

GET-60 E / GET-60 E PLUS INOX

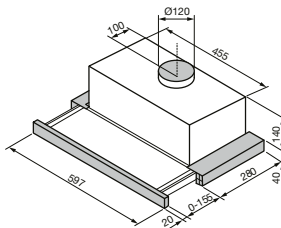
368 m³/h

- hood with filter extension for increasing the suction area
- choice of three fan speeds
- safety switch
- lighting: LED 2× 3 W
- professional metal grease filter
- check valve on discharge
- upper outlet for connection
- air recirculation through carbon filters (accessories)
- version: GET-60 E – white / stainless steel, GET-60 E PLUS INOX – stainless steel
- available sizes (width in mm): 600

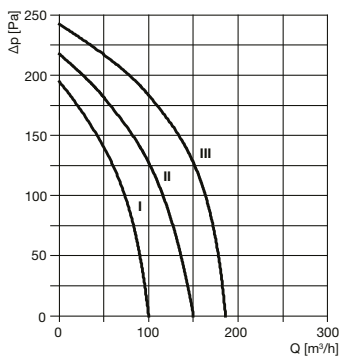

GET-60 E

I – low speed
II – medium speed
III – high speed

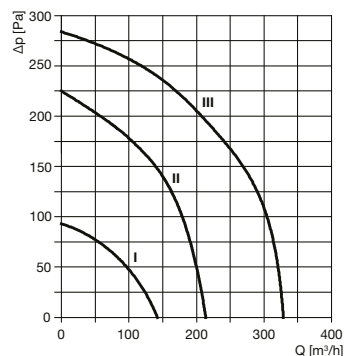

GET-60 E PLUS INOX

I – low speed
II – medium speed
III – high speed

Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
GET-60 E / GET-60 E PLUS INOX	304/368	120	1	3	230	115/140	0.53/0.63	50/56

* sound pressure measured at a distance of 1.5 m in a free field

Accessories		HP E	HA E INOX	BOX E INOX	ONDA CRISTAL E	VA E
	flexible hoses SEMIFLEX® ALUFLEX® TERMOFLEX®	Ø 125	Ø 150	Ø 150	Ø 150	Ø 150
	OSJ steel buckle	Ø 125	Ø 150	Ø 150	Ø 150	Ø 150
	PER check valve	PER 125	PER 150	PER 150	PER 150 W	PER 150
	RH rain cover	RH 125	RH 150	RH 150	RH 150	RH 150
	carbon filters (optional accessories)	HP E HP E N PLUS	HA E HA E PLUS	BOX E	ONDA CRISTAL E	VA E

Accessories		ISLA INOX	ISLA CRISTAL	GE-60 E N METAL	GL-60 E N PLUS METAL	GET-60 E PLUS INOX
	flexible hoses SEMIFLEX® ALUFLEX® TERMOFLEX®	Ø 150	Ø 150	Ø 125	Ø 125	Ø 125
	OSJ steel buckle	Ø 150	Ø 150	Ø 125	Ø 125	Ø 125
	PER check valve	PER 150	PER 150	PER 125	PER 125	PER 125
	RH rain cover	RH 150	RH 150	RH 125	RH 125	RH 125
	carbon filters (optional accessories)	2× DN190	2× DN190	GE E N	GL E N	GET E